


KWCE-171-4D

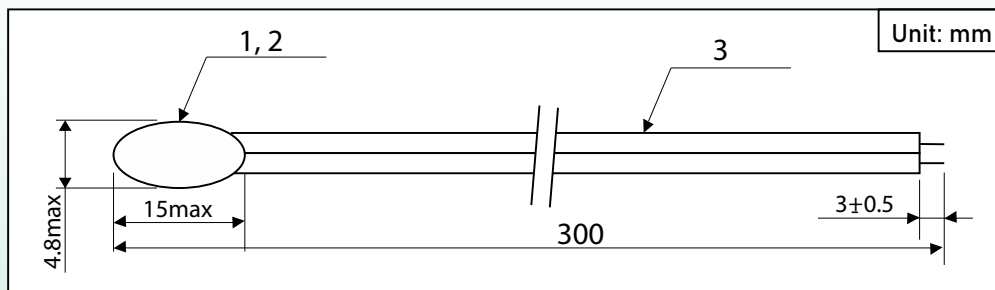

UL2651 26AWG/2C 105C PVC Black	3	Cable	1	Black
Potting epoxy	2	Encapsulation epoxy		
KWMD3435F103F	1	NTC Thermistor	1	
Material list	No	Part	Num.	Color

TECHNICAL SPECIFICATION

Nominal resistance: $R_{25}=20K\Omega \pm 1\%$

B-value: $B_{25/85}=3435K \pm 1\%$

Working temperature range: $-20^{\circ}C +105^{\circ}C$

Insulation resistance: $>100M\Omega$ at 500VDC in water

Voltage endurance: Applying 1800VAC/2S between shell and cable, there is no flash or broken (in water)

Fixing protective tube, applying 10N/3S static pull strength along cable, no change for the appearance

RoHS compliant