


KWCT-171-8A

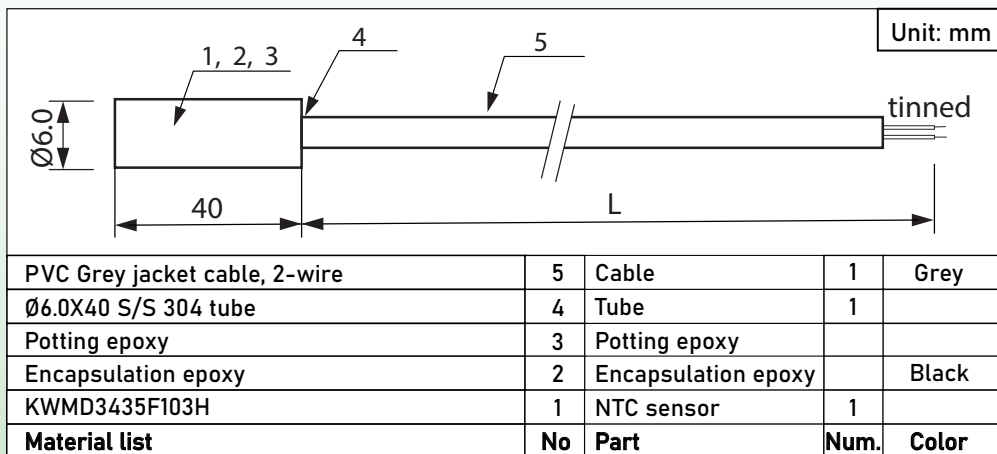

TECHNICAL SPECIFICATION

Nominal resistance: $R_{25}=20K\Omega \pm 3\%$

B-value: $B_{25/85}=3435K \pm 1\%$

Working temperature range: $-20^{\circ}C$ $+105^{\circ}C$

Insulation resistance: $>100M\Omega$ at 500VDC in water

Voltage endurance: Applying 1800VAC/2S between shell and cable, there is no flash or broken

Fixing protective tube, applying 10N/3S static pull strength along cable, no change for the appearance

Connector can afford 10N/min static load, no change for the product appearance