


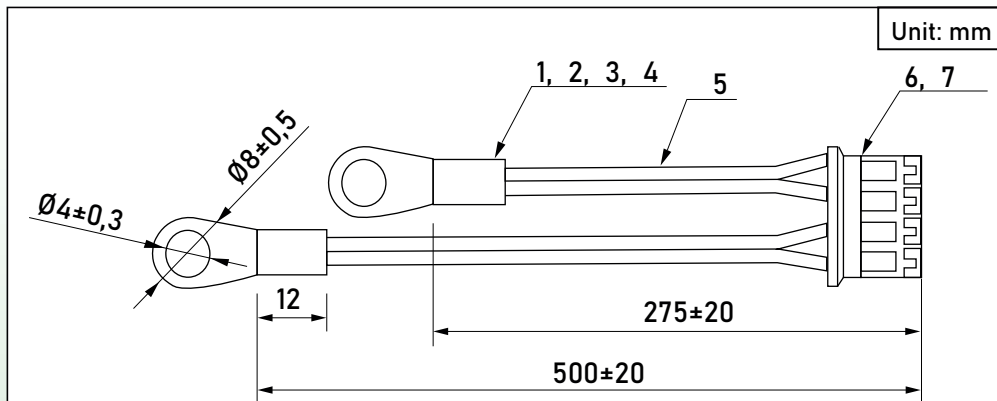

|                                      |           |                   |             |              |
|--------------------------------------|-----------|-------------------|-------------|--------------|
| PH-4Y white plastic connector        | 7         | Plastic connector | 1           | White        |
| PH terminal                          | 6         | Terminal          | 4           |              |
| UL2651 26#PVC Black                  | 5         | Wires             |             | Black        |
| Ø5*24-Ø4 stainless steel fixing clip | 4         | Fixing clips      | 1           |              |
| Potting epoxy                        | 3         | Epoxy             |             |              |
| Coating epoxy                        | 2         | Epoxy             |             |              |
| MG4267F104F                          | 1         | NTC Thermistor    | 1           |              |
| <b>Material list</b>                 | <b>No</b> | <b>Part</b>       | <b>Num.</b> | <b>Color</b> |

## TECHNICAL SPECIFICATION

Nominal resistance:  $R_{25}=100K\Omega \pm 1\%$

V-value:  $B_{25/85}=4267K \pm 1\%$

Working temperature range:  $-20^{\circ}C +105^{\circ}C$

Insulation resistance:  $>100M\Omega$  at 500VDC in water

Applying 10N/3S static pull strenghts along the cable, no change for the appearance