


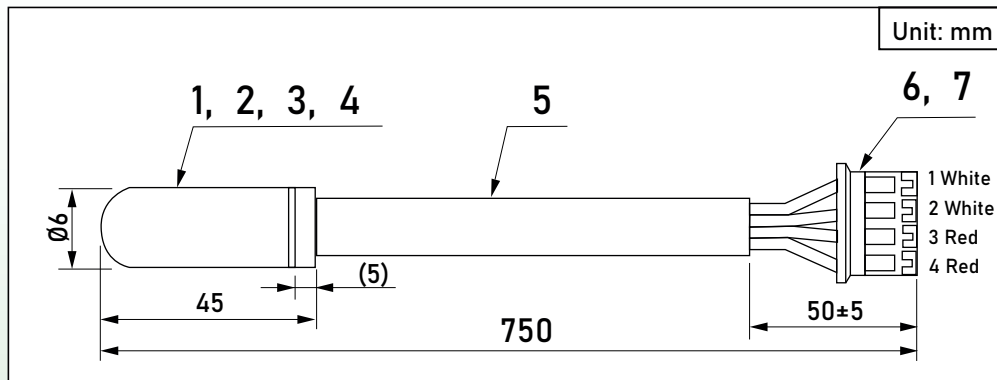

PA-4Y white plastic connector	7	Plastic connector	1	White
PHD-PT terminal	6	Terminal	4	
Ø3.8 26#PVC Black	5	Jacket cable		Black
Ø6x45 stainless steel tube	4	Shell	1	
Potting epoxy	3	Epoxy		
Potting epoxy	2	Epoxy		
3970F103F	1	NTC Thermistor	2	
Material list	No	Part	Num.	Color

TECHNICAL SPECIFICATION

Nominal resistance: $R_{25}=10K\Omega\pm1\%$

V-value: $B_{25/85}=3970K\pm1\%$

Working temperature range: $-20^{\circ}C +105^{\circ}C$

Insulation resistance: $>100M\Omega$ at 500VDC in water

Voltage endurance: Applying 1800VAC / 2S between the shell and the cable, there is no flash or broken (in water)

Applying 10N/3S static pull strenghts along the cable, no change for the appearance